April-2025

A Quality products from the house of OREVA



WIDE RANGE OF

LED LIGHTING



THE POWER OF TECHNOLOGY & INNOVATION



When Passion meets Precision, Perfection is born!

The Great Visionary Man, Lt. Shri. Odhavji Bhai R. Patel, laid the foundation of an organisation, namely "Ajanta Transistor Clock Manufacturing Company", in the year 1971, which started manufacturing of Wall Clocks and achieved several milestones including the major feat of becoming the "World's Largest Clock Manufacturing Company". It later diversified into various business verticals such as Lighting Products (CFLs & LED Lighting), E-Bike (Battery operated Bike), Home Appliances, Fans, Heating Appliances, Electrical Accessories, Electronic Products (Telephones, Calculators, LED TV etc) and Watches.

Ajanta Transistor Clock Manufacturing Company and its sister concern Ajanta Manufacturing Pvt. Ltd. (**Oreva Group**), are the well-known companies, expertise in manufacturing of various products, having strong infrastructure with "**2 huge manufacturing plants**", massively spread over 250 acres of land, one at Morbi (Rajkot District) and another at Samakhiyali (Kutch District), in Gujarat. The Plants have the complete set up of "**in-house manufacturing facility**" integrated with the "**state-of-art R & D Lab**" and firmly adhere to fulfil the Government's vision of "**Make-in-India**". The group of companies have determined to encourage "**Women Empowerment**" and has the workforce of around 5,000 women employees. The company has "**won many prestigious awards**" from various government bodies and as a result, "**Oreva is being regarded as one of the Major Brands in India**", which has been proven by the existence of strong network of more than 55,000 channel partners across the country for diverse products.

Oreva, the well known brand for lighting products, has been considered as the pioneer of manufacturing of CFLs in India and also achieved the magnificent landmark of "India's 2nd Ranked Brand" in terms of Sales Volume of CFL Products in the year 2007 (as per the report of AC Nielsen ORG – MARG Pvt. Ltd., dated 4th February 2008). It later diversified into LED Lighting Products and created its own niche in LED Lighting Industry. It is a well-known fact that "Oreva is one of the largest manufacturers of Lighting Products in India" with a massive in-house manufacturing facility to produce huge variety of LED Lighting Products such as LED Lamps, LED Tube Lights, LED Down/Panel Lights, LED Spot Lights, LED Strip Lights, LED Flood Lights, LED Hi-Bay Lights, LED Street Lights etc. which are available in a wide range "from 0.5 watt to 500 watt". The Company proudly considers itself as the "The Power of Technology & Innovation". It is a significant factor to highlight that the company has "largest capacity of manufacturing of LED Flood Lights and LED Street Lights" with the complete in-house manufacturing facility to produce the entire set of Flood Lights and Street Lights which include die-cast aluminium body, driver, PCB etc. with the help of its various state-of-art equipments. The plant has the own setup of state-of-art R & D Lab with the installation of various testing equipments to inspect quality standards of the products as per BIS norms as well as global standards.

The Company has developed various products to fulfil the necessities of "Mass Consumer Market" in India and the core philosophy of the company is to create "Value for Money" by providing "Quality Products at an Affordable Price" to cater various socio-economic segments of people and it has been instrumental for the accomplishments of the company.









LED LAMPS





ORBL-0.5W - LED LAMP

MRP `55/-

Blister Packing: 6 Pcs. 1 Carton=60 Pcs.

Master Carton Size: L-335 x W-325 x H-250

Features:

- Nominal Voltage 220-240V AC, 50Hz B-22 Lamp Holder
- Polycarbonate Colored Diffuser
- Life upto 15000 Hrs. Input Power: 0.5W

Application

■ Night Lamp ■ Decorative Light ■ Corridors ■ Staircase

Colour: White, Yellow, Green, Blue, Red, Pink, Orange, Warm White





I FD LAMP

M.NO.	MRP Rs.			LUMEN	UNIT	MASTER Carton	MASTER	SIZE (MM)	APPX. M. CARTON		
111.110.	Per Pc.	3000K	4200K	6500K	LOME	WEIGHT	QTY.	L	W	Н	WEIGHT
0.5W	55/-			✓	_	13Gm	60 Units	335	325	250	1.55 Kg
2.9W	110/-			✓	270lm	21Gm	50 Units	262	262	195	1.89 Kg
7W	125/-			✓	735lm	24Gm	50 Units	391	325	255	2.77 Kg
9W	130/-			✓	810lm	27Gm	100 Units	615	310	227	4.89 Kg
12W	215/-			✓	1200lm	43Gm	30 Units	382	320	120	2.10 Kg
15W	260/-			✓	1500lm	56Gm	30 Units	405	335	140	2.30 Kg
18W	345/-			✓	1890lm	81Gm	30 Units	502	420	172	4.27 Kg
23W	475/-			√	2415lm	81Gm	30 Units	502	420	172	4.27 Kg
30W	545/-			✓	3000lm	121Gm	10 Units	530	220	180	2.11 Kg
40W	750/-			√	4000lm	162Gm	10 Units	625	260	196	2.88 Kg
50W	895/-			✓	5000lm	220Gm	10 Units	725	300	218	3.81 Kg

Features: ♦ Energy Efficient ♦ Long Life span ♦ Uniform illumination ♦ Easy Installation ♦ Excellent Light Quality ◆ Environment Friendly ◆ Instant ON ◆ No Harmful Emission ◆ Reduce Maintenance



Energy efficient















Instant ON

High Performance



RADAR SENSOR - LED LAMP

10W RADAR SENSOR 540/-✓ 775lm 76Gm 60 Units 503 410 294 7.98 Kg

EXCLUSIVE FEATURES OF RADAR SENSOR LED LAMP

- ◆ Motion detected: The light will be on when movement objects goes into the effective area, and the light will be turned off after 90 seconds when the object leaves the effective area or keeps motionless. The light will keep working when he (or it) still moves in that area.
- ◆ Microwave radar sensor switch is the motion of the sensor, not just the human body, but also the movement object. Range of motion detection: 4-5 meters. Easy installation - just like an incandescent bulb.



EMERGENCY - LED LAMP

M.NO.	MRP Rs.	COLOU	R TEMPER	ATURE			MASTER CARTON	MASTER	CARTON	SIZE (MM)	APPX. M. CARTON
	Per Pc.	3000K	4200K	6500K	LOINEIL	WEIGHT	QTY.	L	W	Н	WEIGHT
9W EMERGENCY	615/-			✓	-	130Gm	20Units	362	290	155	3.31Kg
12W EMERGENCY	780/-			\checkmark	-	116Gm	25 Units	360	360	160	4.44Kg

Features: ♦ LED Technology ♦ Automatic activation ♦ Battery Backup ♦ Portable Design ♦ Energy Efficient ♦ Long Life span ♦ Uniform illumination ♦ Easy Installation ♦ Excellent Light Quality ♦ Environment Friendly ♦ Instant ON ◆ No Harmful Emission ◆ Reduce Maintenance







Easy to Install







Instant ON

High Performance

Energy efficient

Longer Life





ADIDEV SERIES LED TUBELIGHT

M.NO.	MRP Rs.	COLOUR TEMPERATURE			LUMEN	UNIT	MASTER Carton	MASTER	CARTON	SIZE (MM)	APPX. M. CARTON
	Per Pc.	3000K	4200K	6500K	LOME	WEIGHT	QTY.	L	W	Н	WEIGHT
ADIDEV-5W	225/-			✓	500lm	43 Gm	50 Units	335	255	180	3.11Kg
ADIDEV-10W	250/-			✓	1000lm	69.5 Gm	50 Units	635	255	180	3.41Kg
ADIDEV-20W	375/-			✓	2000lm	150 Gm	40 Units	1135	283	142	6.47Kg

Features: ◆ Operating Voltage: 100V~300V ◆ Voltage: 230V AC ± 10%, 50Hz ◆ 6500K CCT (Cool Day Light) ◆ upto 25000 Hours LED life g Longer life span ◆ Sturdy & Safe High efficiency ◆ Energy saving and maintenance free ◆ Superior colour, increased comfort Improved light levels in work areas ◆ Green lighting technology Lowering air conditioning costs, ◆ Mercury free, No UV & IR radiation



AARIEYANA SERIES - LED TUBELIGHT

M.NO.	MRP Rs.	COLOU	R TEMPER	ATURE	LUMEN	UNIT	MASTER Carton	MASTER		APPX. M. CARTON WEIGHT	
	Per Pc.	3000K	4200K	6500K		WEIGHT	QTY.	L	W	Н	WEIGHT
AARIEYANA 30W	575/-			✓	3300lm	322.5Gm	20 Units	1205	200	175	9.54Kg

Features: ♦ Operating Voltage: 100V~300V ♦ Voltage: 230V AC ± 10%, 50Hz ♦ 6500K CCT (Cool Day Light) ♦ upto 25000 Hours LED life g Longer life span ♦ Sturdy & Safe High efficiency ♦ Energy saving and maintenance free ♦ Superior colour, increased comfort Improved light levels in work areas ♦ Green lighting technology Lowering air conditioning costs, ♦ Mercury free, No UV & IR radiation



SILVER SERIES - LED TUBELIGHT

M.NO.	MRP Rs.	COLOU	JR TEMPER	ATURE	LUMEN	UNIT	MASTER Carton	MASTER	CARTON	SIZE (MM)	APPX. M. CARTON
111.1101	Per Pc.	3000K	4200K	6500K		WEIGHT	QTY.	L	W	Н	WEIGHT
SILVER-40W	985/-	\checkmark	✓	✓	4000lm	443.5Gm	10 Units	1170	215	115	6.40Kg


Features: ♦ Operating Voltage: 100V~300V ♦ Voltage: 230V AC ± 10%, 50Hz ♦ 6500K CCT (Cool Day Light) ♦ upto 25000 Hours LED life g Longer life span ♦ Sturdy & Safe High efficiency ♦ Energy saving and maintenance free ♦ Superior colour, increased comfort Improved light levels in work areas ♦ Green lighting technology Lowering air conditioning costs, ♦ Mercury free, No UV & IR radiation



GOLDEN SERIES - LED TUBELIGHT

M.NO.	MRP Rs.	COLOU	JR TEMPER	ATURE	LUMEN	UNIT	MASTER Carton	MASTER	CARTON	SIZE (MM)	APPX. M. CARTON
	Per Pc.	3000K	4200K	6500K		WEIGHT	QTY.	L	W	Н	WEIGHT
GOLDEN-60W	1480/-	-	✓	√	6000lm	615Gm	10 Units	1170	225	140	7.50Kg

Features: ◆ Operating Voltage: 100V~300V ◆ Voltage: 230V AC ± 10%, 50Hz ◆ 6500K CCT (Cool Day Light) ◆ upto 25000 Hours LED life g Longer life span ◆ Sturdy & Safe High efficiency ◆ Energy saving and maintenance free ◆ Superior colour, increased comfort Improved light levels in work areas ◆ Green lighting technology Lowering air conditioning costs, ◆ Mercury free, No UV & IR radiation




PLATINUM SERIES - LED TUBELIGHT

M.NO.	MRP Rs.	COLOU	IR TEMPER	ATURE	LUMEN	UNIT	MASTER Carton	MASTER CARTON SIZE (MM)		MI CARTON	
	Per Pc.	3000K	4200K	6500K		WEIGHT	QTY.	L	W	Н	WEIGHT
PLATINUM-80W	1940/-			√	8000lm		10 N	1041	250	145	
PLATINUM-100W	2505/-			√	10000lm		10 N	1211	250	145	

Features: ◆ Operating Voltage: 100V~300V ◆ Voltage: 230V AC ± 10%, 50Hz ◆ 6500K CCT (Cool Day Light) ◆ upto 25000 Hours LED life g Longer life span ◆ Sturdy & Safe High efficiency ◆ Energy saving and maintenance free ◆ Superior colour, increased comfort Improved light levels in work areas ◆ Green lighting technology Lowering air conditioning costs, ◆ Mercury free, No UV & IR radiation

LED DOWN/PENEL LIGHT & SPOT LIGHT





RL SERIES - DOWN LIGHT

M.NO.	M NO TAKE 1831		R TEMPER	ATURE	LUMEN	CUT OUT SIZE(MM)	MASTER CARTON	MASTER	SIZE (MM)	APPX. M. CARTON	
	Per Pc.	3000K	4200K	6500K		Ø	QTY.	L	W	Н	WEIGHT
RL-ORDL-R-12W	575/-	✓	✓	✓	1200lm	150mm	20 Units	500	360	204	5.244Kg
RL-ORDL-R-15W	670/-	√	✓	✓	1500lm	150mm	20 Units	500	360	204	5.412Kg
RL-ORDL-R-20W	1080/-			√	2000lm	205mm	20 Units	505	460	260	8.590Kg
RL-ORDL-R-10W-3 IN 1 CCT	540/-		3 in 1		900lm	100mm	20 Units	500	260	153	3.056Kg
RL-ORDL-R-15W-3 IN 1 CCT	890/-		3 in 1		1350lm	150mm	20 Units	500	360	204	5.224Kg

Features: ♦ Energy Efficient ♦ Long Life span ♦ Slim & Flat ♦ Uniform illumination ♦ Easy Installation ♦ Excellent Light Quality ◆ Environment Friendly ◆ Instant ON ◆ Aesthetic appeal

















PENEL LIGHT

M.NO.	MRP Rs. COLOUR TEMPE		JR TEMPER	ATURE	LUMEN	MEN CUT OUT SIZE(MM)	F(MM) CARTON	MASTER	CARTON	SIZE (MM)	APPX. M. CARTON
mino.	Per Pc.	3000K	4200K	6500K	LOWILIN	SIZE(IVIIVI)	QTY.	L	W	Н	WEIGHT
ORPL-R-9W				✓	720lm	92mm	20 Units	385	265	160	
ORPL-R-12W				✓	960lm	114mm	20 Units	390	315	185	
ORPL-R-18W				✓	1440lm	139mm	20 Units	390	375	220	
ORPL-SQ-9W				✓	720lm	92mm	20 Units	385	265	160	
ORPL-SQ-12W				✓	960lm	114mm	20 Units	390	315	185	
ORPL-SQ-18W				/	1440lm	139mm	20 Units	390	375	220	

Features: ♦ Energy Efficient ♦ Long Life span ♦ Slim & Flat ♦ Uniform illumination ♦ Easy Installation ♦ Excellent Light Quality ◆ Environment Friendly ◆ Instant ON ◆ Aesthetic appeal















Energy efficient

Easy to Install

High Performance







COB SERIES - LED **SPOT LIGHT**

		<u> </u>									
M.NO.	MRP Rs.	COLOU	IR TEMPER	ATURE	LUMEN	CUT OUT	MASTER CARTON	MASTER	CARTON	SIZE (MM)	APPX. M. CARTON
111.110.	Per Pc.	3000K	4200K	6500K	LOWILIN	SIZE(MM)	QTY.	L	W	Н	WEIGHT
ORSL-PR-2W	150/-		K, 4200K en, Blue,		100lm	Ø32	50 Units	255	110	96	0.825Kg
ORSL-PR-3W	275/-	✓	✓		240lm	Ø54	20 Units	255	172	175	1.606Kg
ORSL-PR-6W	475/-	✓	✓		540lm	Ø67	10 Units	265	212	115	1.236Kg
ORSL-PR-9W	599/-	✓	√		810lm	Ø88	10 Units	305	252	135	1.860Kg
M.NO.	MRP Rs.	COLOU	IR TEMPER	ATURE	LUMEN	CUT OUT	MASTER CARTON	MASTER CARTO		SIZE (MM)	APPX. M. CARTON
Willia.	Per Pc.	3000K	4200K	6500K	LOWILIN	SIZE(MM)	QTY.	L	W	Н	WEIGHT
ORSL-R1-1W COB	135/-		√	✓	70lm	Ø38	40 Units	280	225	135	2.70Kg
ORSL-R1-3W COB	155/-	X	√	✓	330lm	Ø40	40 Units	280	225	135	2.90Kg
ORSL-SQ1-3W COB	155/-	X	√	✓	330lm	Ø40	40 Units	280	225	135	8.00Kg
ORSL-R2-3W COB	275/-	X	✓	✓	229lm	Ø54	30 Units	385	230	150	3.62Kg
ORSL-R3-5W COB	475/-			~	550lm	Ø70	20 Units	457	185	165	3.00Kg
M.NO.	MRP Rs.	COLOU	IR TEMPER	ATURE	LUMEN	CUT OUT	MASTER CARTON	MASTER	CARTON	SIZE (MM)	APPX. M. CARTON
111.110.	Per Pc.	3000K	4200K	6500K	LOWILIN	SIZE(MM)	QTY.	L	W	Н	WEIGHT
ORSL-R4-11W COB	795/-	✓		~	1210lm	Ø90	20 Units	577	235	195	5.11Kg
ORSL-R5-18W COB	1370/-	✓			1238lm	Ø116	10 Units	475	295	155	4.90Kg
ORSL-R6-30W COB	2420/-	✓	√	✓	2700lm	Ø145	10 Units	640	365	195	9.00Kg

Features: ♦ Energy Efficient ♦ Long Life span ♦ Slim & Flat ♦ Uniform illumination ♦ Easy Installation ♦ Excellent $\mbox{Light Quality} \ \, \mbox{Focused beam} \ \, \mbox{\bigstar Environment Friendly} \ \mbox{\bigstar Instant ON} \ \ \, \mbox{\bigstar Aesthetic appeal}$













High Performance







Energy efficient





Longer Life



Easy to Install




.



Instant ON



High Performance

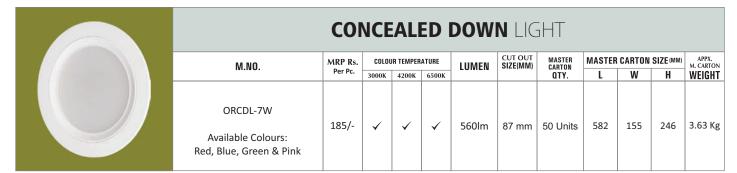



LED STRIKER LIGHT

M.NO.	MRP Rs.	COLOUR TEMPERATURE	LUMEN	MASTER CARTON	MASTER	CARTON	SIZE (MM)	APPX. M. CARTON
Wi.WO.	Per Pc.	OSEOGN TERM EINTONE	LOWILIN	QTY.	L	W	Н	WEIGHT
Striker-RSL-3W (White, Red, Green, Blue & Pink)	145/-	CCT-6500K CCT-4000K CCT-3000K Red, Green, Blue & Pink	120lm	50 Units	340	125	150	1.82 Kg

/

LED FLOOD LIGHTS





R	EGUL	AR	SER	RIES	- FLO	OD L	IGHT9	5			
M.NO.	MRP Rs.	COLOU	IR TEMPER	ATURE	LUMEN	UNIT	MASTER Carton	MASTER	CARTON	SIZE (MM)	III. CARTON
	Per Pc.	3000K	4200K	6500K		WEIGHT	QTY.	L	W	Н	WEIGHT
ORFLD-20W	990/-	\checkmark		\checkmark	2000lm	740Gm	20 Units	530	400	170	15.80Kg
ORFLD-500W	24555lm			\checkmark	55000lm	10500Gm	1 Unit	460	395	235	12.40Kg

SPECIFICATION:

- ♦ Input Voltage: 220-240V AC, 50 Hz ♦ Operating voltage range: 180V to 264V AC ♦ Beam Angle: 80° (± 10%) ♦ IP Rating: Ip65
- ♦ Average life: (Burning Hrs): 25000 Hrs. ♦ Working Temperature: -20° C to 45° C ♦ Housing: Aluminum Material ♦ CRI: ≥80













Latest LED Technology

Non Dimmable

Flicker free

NIFA CEDIEC

Environment Friendly

Energy Efficient



NEO SERIES - FLOOD LIGHTS												
M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT	MASTER CARTON	MASTER CARTON SIZE (MM)			m. Callinois	
		3000K	4200K	6500K	LOWILIN	WEIGHT	QTY.	L	W	Н	WEIGHT	
ORFLD-30W NEO	1325/-			✓	3000lm	323 Gm	10 Units	300	175	160	3.54 Kg.	
ORFLD-50W NEO	2140/-			✓	5000lm	514 Gm	10 Units	300	235	195	5.68 Kg.	
ORFLD-100W NEO	3910/-			✓	10000lm	802 Gm	6 Units	303	190	245	5.45 Kg.	
ORFLD-150W NEO	7610/-			✓	15000lm	1251 Gm	4 Units	368	135	300	5.48 Kg.	
ORFLD-200W NEO	9820/-			✓	20000lm	1676 Gm	4 Units	410	130	335	7.30 Kg.	
ORFLD-300W NEO	17555/-			✓	30000lm	2330 Gm	2 Units	465	75	355	5.09 Kg.	
ORFLD-400W NEO	21555/-			✓	40000lm	3346 Gm	2 Units	510	70	403	7.10 Kg.	

SPECIFICATION:

- ♦ Input Voltage: 220-240V AC, 50 Hz ♦ Operating voltage range: 180V to 264V AC ♦ Beam Angle: 80° (± 10%) ♦ IP Rating: Ip65
- ♦ Average life: (Burning Hrs): 25000 Hrs. ♦ Working Temperature: -20° C to 45° C ♦ Housing: Aluminum Material ♦ CRI: ≥80













Latest LED Technology

Non Dimmable

Flicker free

Environment Friendly

Energy Efficient



RGB NEO SERIES - FLOOD LIGHTS MASTER MASTER CARTON SIZE (MM) MRP Rs. UNIT M.NO. COLOUR CARTON WEIGHT WEIGHT QTY. н 3.54 Kg. 1915/-323 Gm 10 Units ORFLD-30W RGB NEO 300 175 160 4 Main Colours ORFLD-50W RGB NEO 3025/-5.68 Kg. 514 Gm | 10 Units 300 235 195 12 different Colour 5.45 Kg. ORFLD-100W RGB NEO 5205/-802 Gm 6 Units 303 190 245 **Total 16 Colours** ORFLD-150W RGB NEO 7485/-5.48 Kg. 1251 Gm 4 Units 368 135 300

4 MODES: FLASH / STROBE / FADE / SMOOTH WITH REMOTE OPERATION

SPECIFICATION:

- ♦ Input Voltage: 230V AC ±10%, 50 Hz ♦ Operating voltage range: 180V to 264V AC ♦ IP Rating: Ip65
- ♦ Working Temperature: -10° C to 55° C ♦ Housing: Aluminum Material ♦ Wall Mounting















Latest LED Technology Non Dimmable Flicker free

Environment Friendly

Energy Efficient

























































LED STREET LIGHTS







STD SERIES - LED STREET LIGHT												
M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT	MASTER CARTON	MASTER CARTON SIZE (MM)			APPX. M. CARTON	
		3000K	4200K	6500K	LOWILIN	WEIGHT	QTY.	L	W	Н	WEIGHT	
OLSL-18W STD	1,700/-	✓		\checkmark	1560lm	920Gm	10 Units	335	245	280	11.00Kg	
OLSL-24W STD	1,755/-	✓		\checkmark	2040lm	920Gm	10 Units	335	245	280	11.00Kg	
OLSL-30W STD	2,015/-	√		\checkmark	3000lm	920Gm	10 Units	335	245	280	11.80Kg	
OLSL-50W STD	2,395/-	√		\checkmark	5000lm	920Gm	10 Units	335	245	280	11.50Kg	
OLSL-50W STD	2,395/-	✓		✓	5000lm	920Gm	10 Units	335	245	280	11.50Kg	

DX SERIES - LED STREET LIGHT												
M.NO.	MRP Rs.			ATURE	LUMEN	UNIT	MASTER Carton	MASTER CARTON SIZE (MM)				
	Per Pc.	3000K	4200K	6500K	LOWILI	WEIGHT	QTY.	L	W	Н	WEIGHT	
OLSL-15W DX	1700/-			✓	1650lm	900Gm	10 Units	310	200	310	11.30Kg	
OLSL-20W DX	1755/-			✓	2200lm	900Gm	10 Units	310	200	310	11.50Kg	
OLSL-25W DX	1755/-				2750lm	900Gm	10 Units	310	200	310	11.50Kg	

- ♦ Rated Voltage AC 90 ~ 300V ♦ Frequency-50Hz ♦ PF > 0.95 ♦ LED : 130 Lm/w ♦ Ra > 72 ♦ THD < 10% ♦ No Flickering ♦ Working Life Up To 50,000 Hrs.</p>
- ◆ IC Base LED Driver ◆ EMC Compliance ◆ Aluminum Body ◆ Water Proof (Ip67) ◆ Short Circuit Proof ◆ Over Voltage Protection ◆ Under Voltage Protection
- ♦ 4 KVA Surge Protection ♦ Heat Resistant Tuffen Glass ♦ Polyester Powder Coating Colour ♦ Wall & Pole Fitting



NEO SERIES - LED STREET LIGHT												
MRP Rs.	COLOUR TEMPERATURE			LUMEN	UNIT	MASTER Carton	MASTER CARTON SIZE (MM)					
Per Pc.	3000K	4200K	6500K		WEIGHT	QTY.	L	W	H	WEIGHT		
5240/-			✓	10000lm	0.900 Gm	5 Units	450	230	198	6.05 Kg.		
	Per Pc.	Per Pc. 3000K	MRP Rs. COLOUR TEMPER 3000K 4200K	MRP Rs. Per Pc. 3000K 4200K 6500K	MRP Rs. COLOUR TEMPERATURE LUMEN 3000K 4200K 6500K	MRP Rs.	MRP Rs. COLOUR TEMPERATURE LUMEN UNIT WEIGHT CARTON QTY.	MRP Rs. COLOUR TEMPERATURE LUMEN UNIT WEIGHT CARTON QTY. MASTER CARTON QTY. LUMEN LUMEN	MRP Rs. COLOUR TEMPERATURE LUMEN UNIT CARTON OTY. MASTER CARTON OTY. L W	MRP Rs. Per Pc. COLOUR TEMPERATURE 3000K LUMEN UNIT WEIGHT MASTER CARTON SIZE (MM) OTY. MASTER CARTON SIZE (MM) L		

- ◆ Rated Voltage: 220-240V AC, 50Hz ◆ Power Factor: ≥0.90 ◆ Voltage Range:140V to 280V AC ◆ Lumen: 10000lm ±10%)
- ◆ Average life (Burning Hrs):25000 Hrs. ◆ Working Temperature range: From -10° C to 45° C ◆ Surge Protection:4 KV(Internal)
- ♦ Phase to Phase Protection: 440V For 8 Hrs. ♦ Circuit Protections: Open & Short Circuit Protection, Over Thermal Protection
- ♦ IP Rating: IP65 ♦ Dimensions: L-408mm, W-167m, H-29.2mm ± 5mm





Mfg. by: Ajanta Manufacturing Pvt.Ltd.(OREVA Group)



OREVA House, Thaltej Cross Road, S.G.Highway, Ahmedabad-380 054, Gujarat, India Toll Free No: 1800 120 4445, E Mail- marketing.led@oreva.com, Web: www.oreva.com







